
Storage Tank Modelling – 2D and 3D Concrete Models


For LUSAS version:	23.0
For software product(s):	LUSAS Tank
With product option(s):	Nonlinear, Dynamic, Thermal/Field, RC Slab design
Note: The example exceed	ls the limits of the LUSAS Teaching and Training Version.

Description

The LUSAS Tank software product allows you to automatically create a range of 2D and 3D finite element models of above ground, circular, full containment, concrete or double-walled steel tanks from user-defined common tank definition data.

The range of concrete models include:

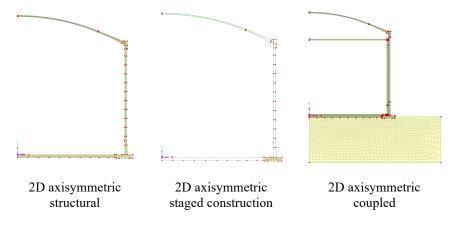

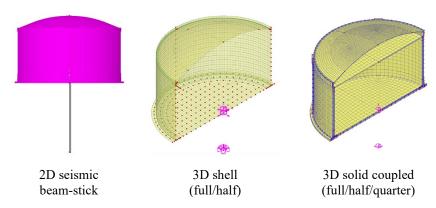

For clarity, loading and supports have been omitted from the above models.

Using these models, a range of analyses can be performed, and design checks can be optionally carried out for specified load combinations and supported design codes.

Benefits of multiple models

The ability to define different types of models from common tank definition data allows for preliminary studies to be done using any of the 2D tank modelling options that are available, before moving on developing and investigating the suitability of designs in more detail using 3D shell or 3D solid models.

Comparative studies can be achieved by copying tank definitions and re-creating models from revised data. Design checks are performed using 3D shell models.

Objective

- ☐ To carry out illustrative 2D and 3D modelling and analysis of concrete tanks.
- ☐ To provide an overview of viewing design results from a 3D shell model.

Keywords

Tank, 2D, 3D, Axisymmetric, Shell, Solid, Concrete, Thermal, Coupled, Structural, Seismic, Staged Construction, Design, Spillage.

Running LUSAS Modeller

For details of how to run LUSAS Modeller, see the heading *Running LUSAS Modeller* in the *Introduction to LUSAS Worked Examples* document.

Note. This example is written assuming a new LUSAS Modeller session has been started. If continuing from an existing Modeller session select the menu command **File>New** to start a new model file. Modeller will prompt for any unsaved data and display the New Model dialog.

Creating a New Model




- Enter a file name of tank
- Use the default **User-defined** working folder.
- Ensure an Analysis type of 3D is set. This is somewhat irrelevant since the
 analysis type will be automatically set when each tank model is created by
 LUSAS Tank.
- Click the **OK** button.

Defining tank definition data

LUSAS Tank uses modelling units of 'N,m,kg,s,C'. If these are not in use when creating the Tank Definition, a statement advising that the units will be changed will be displayed.

Tank Tank definition...

The Tank Definition dialog contains default values and settings to build an illustrative tank of a chosen tank type. For these worked examples, concrete tank models will be generated using default data.

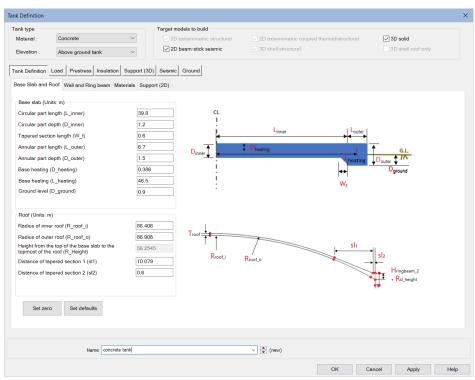

• Ensure the tank type material is set to **Concrete** and the elevation is set to **Above** ground tank



Note. For concrete tanks, in the 'Target model to build' panel, the '2D axisymmetric structural' option is always 'on' by default since it requires the minimum amount of data in order to create a tank model. Other tank types may be selected alongside this option, requiring more data to be supplied.

To allow all types of model to be generated, in the 'Target model to build' panel:

- Select the **2D axisymmetric coupled/thermal structural** checkbox. This adds an 'Insulation' button to the dialog.
- Select the 2D beam-stick seismic check box. This adds a 'Seismic' and 'Ground' button to the dialog.
- Select the **3D shell structural** check box. This adds a 'Support (3D)' button to the dialog.
- Select the **3D** solid check box. This then 'greys-out' the 2D thermal and 3D shell models checkbox options since all data required by these models will be provided by that defined for the 3D solid model.
- Beneath the check boxes **click on each button in turn**, and then on the tabs that appear for each button, to browse the example data that is provided, and hence see the type of data that is required to model each tank type.
- Enter a tank definition name of **concrete tank** and press the **OK** button.


A concrete tank definition entry will be added to the Utilities 🏕 Treeview.



Note. Models of metallic tanks may also be created using LUSAS Tank. For these, no 3D solid model is available but all other target models as well as a 3D shell roof-only model can be created. These types of tanks are not covered by this example, but model creation after entering all relevant details is very similar.

Editing tank definition data

Changes to the tank definition data for this range of tank models can be made within the Utilities Treeview by double-clicking on the created utility or using the 'Edit' option on the context menu provided.





Note. Editing of previously defined tank data can only be achieved by using this context menu.



Note. Re-selection of the menu item **Tank > Tank Definition** will generate a <u>new</u> tank definition each time.

Concrete tank model examples available

- ☐ 2D axisymmetric structural
- ☐ 2D axisymmetric staged construction
- ☐ 2D axisymmetric coupled thermal / structural
- □ 2D beam-stick seismic
- □ 3D shell structural
- ☐ 3D solid coupled thermal / structural


Whilst each example can be undertaken in isolation from the others, it is recommended to work through each example as listed as they are in order of complexity.


			Concrete N			

2D Axisymmetric Structural Tank Model

Creating the model

After having defined the relevant tank data, a 2D axisymmetric structural analysis tank model will be created first.



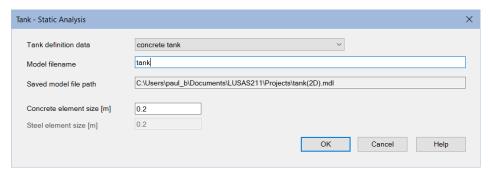



Tip. Press the **Help** button for more information about this dialog and the type of model that is created.


Accepting the default values on the dialog, enter a model filename of tank



Note. The filename entered will be appended with '(2D)' to make a unique filename for a range of tanks that use the same base name.

• Click **OK**, and then click **OK** again to save any changes to the previously defined model. The saved tank definition will be copied in the created model.

The following model will be created.

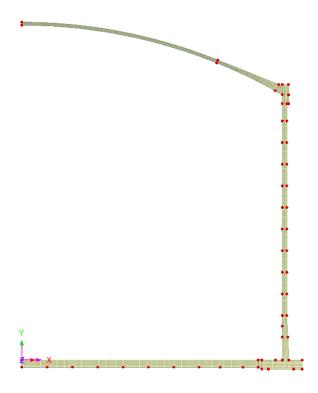



Note. Browsing the Groups , Attributes and Analyses treeviews will show the groups of features added, the attributes created and assigned to the model, and the analyses and loadcases defined.



Note. Context menus for the items present can be used to locate features assigned to groups and to visualise attribute assignments.

Viewing assigned loadings

By ensuring the loading arrows are being drawn, and setting active each loadcase in turn, the loadings assigned to the model can be viewed and checked.

Running the analysis


With the model loaded:

Select the **Solve Now** button from the toolbar and click **OK** to run the analyses listed.

A LUSAS Datafile will be created from the model information. The LUSAS Solver uses this datafile to perform the analysis.

If the analysis is successful...

Analysis loadcase results are added to the Analyses Treeview and a deformed mesh layer is added to the view window.

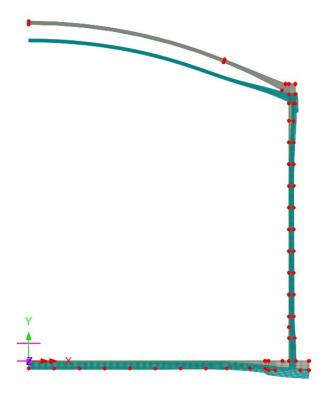


Viewing the results

- For clarity when viewing the contour results, in the Layers Treeview, turn off the display of the **Mesh** layer and the **Deformed mesh** layer.
- In the Analyses Treeview, ensure the loadcase **SelfWeight** is set active.

Contours


• With no features selected, click the right-hand mouse button in a blank part of the view window and select the **Contours** option to add the contours layer to the Treeview.

• Select entity Stress – Axisymmetric Solid and component SX and click OK.

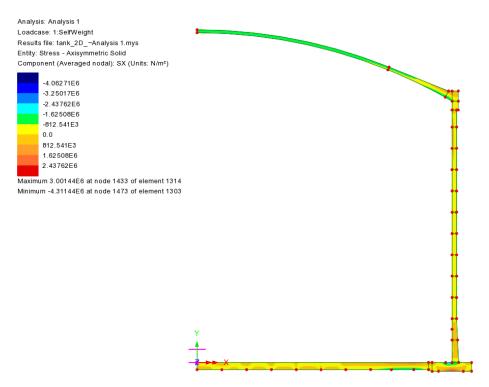


Values

- With no features selected, click the right-hand mouse button in a blank part of the view window and select the **Values** option to add the contours layer to the Treeview.
- Select entity Stress- Axisymmetric Solid and component SX and click OK.

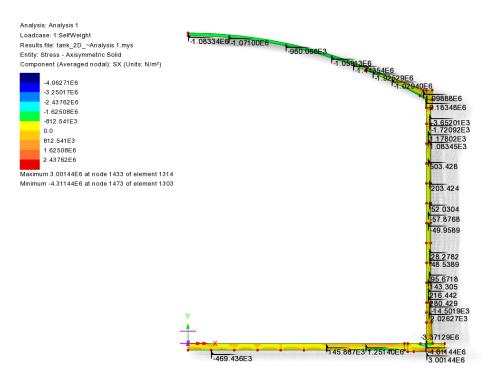

Zooming-in to regions of interest will provide more detail and values.

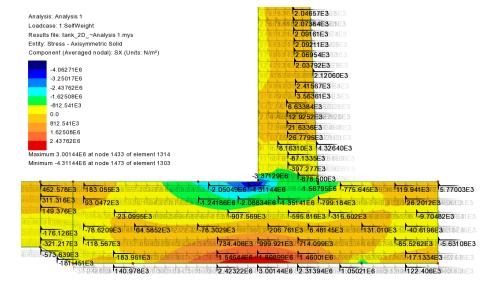




Resize the model to fit the view window.

Graphs of stress and resultant forces through wall

The change of stress through the wall can be plotted.


With the whole model in view:

Utilities Graph through 2D With By cursor selected, click OK to accept the defaults and draw a line through the wall at a height of 35m. Use the left-hand ruler to help with the location.

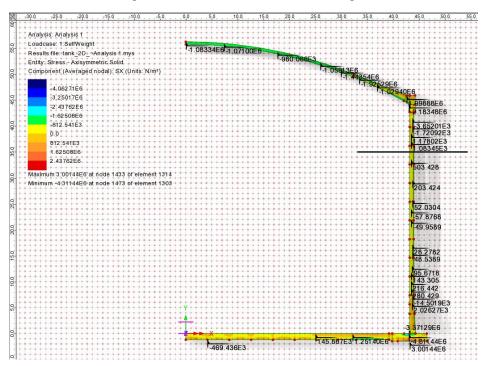

- On the Loadcases and Extent dialog ensure SelfWeight is selected and click Next.
- On the Slice data dialog select entity Stress Axisymmetric Solid and component SX and click Next.
- On the Display Graph dialog enter a graph title of **SX in the wall**, an X axis name of **Distance**, and a Y axis name of **SX** and click **Finish**.

A graph showing the variation of SX with wall thickness is generated. As the model units are N,m, the stress unit is N/m². The X axis in the graph is the distance from the start point of the selected slicing line.

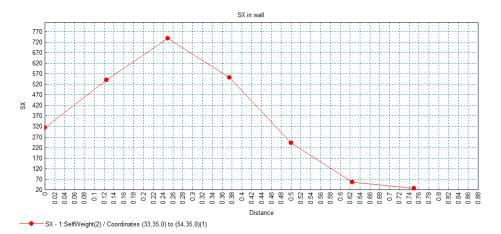

• Reselect the View window tab.

To plot a graph of resultant forces through the wall at the same location:


Utilities

Graph through 2D

Select At location of existing graph and click OK.

- On the Loadcases and Extent dialog ensure **SelfWeight** is selected and click **Next**.
- On the Slice data dialog select Resultant effects from 2D model option and click Next.
- On the Display Graph dialog enter a graph title of **SX** in the wall, an X axis name of **Distance**, and a Y axis name of **SX** and click **Finish**.

Resultant forces are computed and printed in the text output window, and a graph showing the variation of forces at the wall thickness is generated.

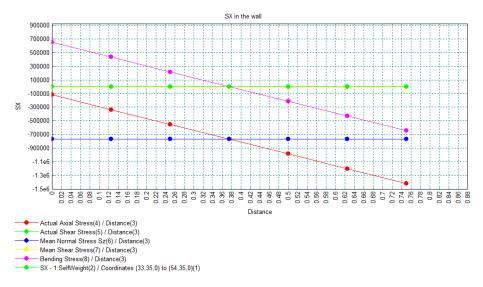

Reselect the View window.


Export Forces to Excel (2D)

Forces calculated for one or more model loadcases can be exported to an Excel spreadsheet.

Tank

Excel Tools


Export Forces/Design Results

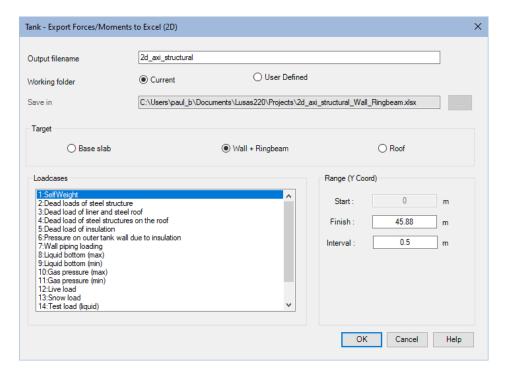

- Enter an output filename of **2d_axi_structural** (noting that the target name is appended to the name entered).
- For a target, choose Wall + Ringbeam
- In the Loacases panel, ensure **Self weight** is selected and press **OK**


A spreadsheet containing section forces including axial force, shear force, moment force for Wall & RingBeam will be created.

• Open the working folder to view this file.

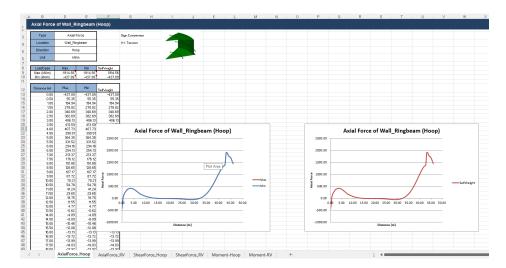



Note. If all the loadcases from the Loadcases panel were to be selected, the forces for all loadcases are computed, resulting in the following output.

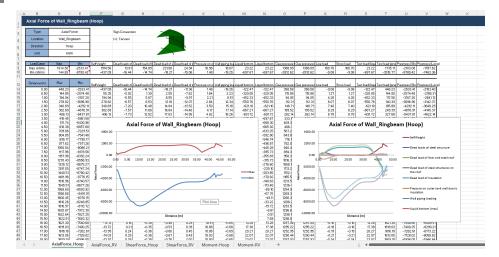


This completes this tank example.

2D Axisymmetric Staged Construction Tank Model

Creating the model

To create a staged construction tank model from previously defined tank definition data:

Tank
Create 2D Model
Staged
Construction

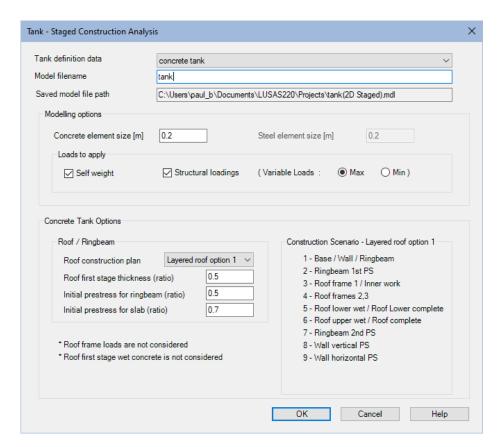




Tip. Press the **Help** button for more information about this dialog and the type of model that is created.

- Accepting the default values on the dialog, enter a model filename of **tank** and click **OK**. The saved model name will include '(2D Staged)' to identify this model within the set of tank models that are being created.
- Click **OK** to save any changes to the previously defined model.
- Click Yes to accept that the wall will be constructed all at once and not in stages.

The following Analyses Treeview and model will be created.

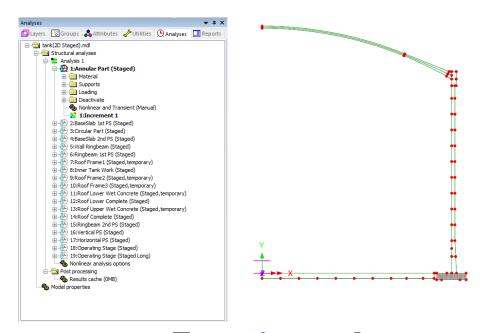



Note. Browsing the Groups , Attributes and Analyses Treeviews will show the groups of features added, the attributes created and assigned to the model, and the analyses and loadcases defined.



Note. Context menus for the items present can be used to locate features assigned to groups and to visualise attribute assignments.


Tank construction stages - an overview

Tank construction stages are created using activation and deactivation of elements and a nonlinear analysis sequence which inherits the stresses and strains from the previous stages. All materials are assumed to be linear elastic.

The total number of construction stages to be created will be as stated on the 'Staged construction analysis' dialog according to the chosen 'Roof construction plan', the 'Roof 1st stage thickness (ratio)', the 'Initial Prestress for Ringbeam (ratio) and the 'Initial Prestress for slab (ratio)' plus any wall construction stages as defined within the Tank definition dialog itself.



Note. For this overview example no wall construction stages are going to be considered. If these were to be introduced as part of a construction check, they would be defined by visiting the 'Wall and Ringbeam' tab of the Tank Definition dialog and pressing the 'Wall stages' button.

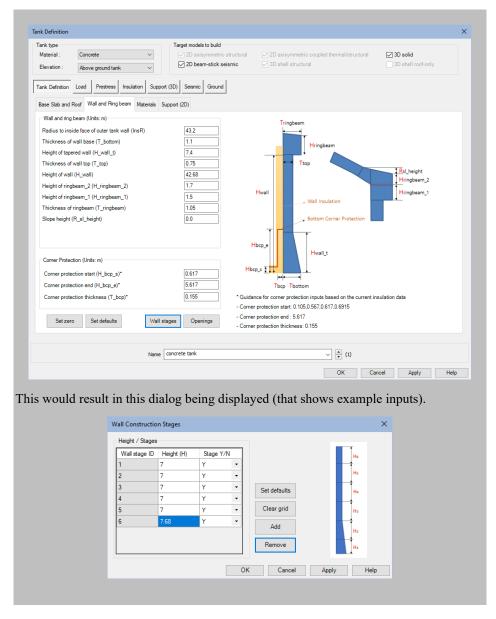

Viewing construction stages

Construction stages (and the features and elements that comprise those stages) may be viewed by setting active each loadcase in turn within the Analyses Treeview of the generated model.

Viewing assigned loadings

By ensuring the loading arrows are being drawn, and setting active each loadcase in turn, the loadings assigned to the model can be viewed and checked.


Nonlinear Analysis Controls

The geometry of the structure changes at each loadcase (each stage), so a Nonlinear Control is used (appearing as Nonlinear and Transient (Manual) with the Analyses Treeview).

When Nonlinear Control is set for the 1st loadcase (as in this case) it is applied to all the other subsequent loadcases unless otherwise defined separately for them.

'Manual' incrementation control is set in the model, which means that:

- ☐ Subsequent loadcases inherit the stress and strains from the previous loadcases
- ☐ Subsequent loadcases inherit the support conditions from the previous loadcases
- ☐ Loading is not inherited.
- In the Analyses Treeview double click the Nonlinear and Transient (Manual) entry to see the default settings used

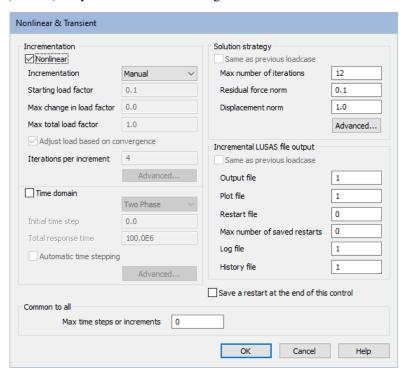

Loading

Setting a 'Manual' incrementation means that any loading defined in a previous loadcase is not inherited by the following loadcase. As a result, all loading that applies to the current loadcase is and should be assigned separately.

Construction stages explained

With reference to the Analyses Treeview, note that the loadcase id numbers relate to the stages as described below.

Stage 1: Annular Part + Stage 2: BaseSlab 1st PS

Self-weight is assigned using 'Gravity' loading. The initial prestress loading to the BaseSlab is added in Stage 2. If no prestress is defined for the slab, Stage 2 will be the same as Stage 1.

Stage 3: Circular Part + Stage 4: BaseSlab 2nd PS

The 2nd prestress loading to the BaseSlab is added in Stage 4. If no prestress is defined for the slab, Stage 4 will be the same as Stage 3.

Stage 5: Wall Ringbeam + Stage 6: Ringbeam 1st PS

At Stage 5 the Wall and Ringbeam are completed. The loading is the same as Stage 4.

Initial Horizontal Prestress for the RingBeam is added in Stage 6, but with a load factor of 0.5 (the 'Initial prestress for ringbeam (ratio)' from the model creation dialog) which means only 50% of the defined RingBeam prestress is applied at this stage.

Stage 7: Roof Frame 1 + Stage 8: Inner Tank Work

Stage 7 allows for an additional temporary load to be applied when the temporary frame is installed for preparing the roof 1st concrete pour. If required, the loading for Roof Frame 1 should be defined and assigned to the model manually.

Stage 8 allows for any additional loading to be applied while building the inner tank. If required, this loading should be defined and assigned to the model manually.

Stage 9: Roof Frame 2 + Stage 10: Roof Frame 3

Stage 9 and Stage 10 allows for temporary loads to be assigned when the temporary frame is installed for preparing the roof 2nd concrete pour. If required, the loading for 'Roof Frame 2' and 'Roof Frame 3' should be defined and assigned to the model manually.

Stage 11: Roof Lower Wet Concrete + Stage 12: Roof Lower Complete

Stage 11 assumes that the roof is in the process of being built and the poured concrete is acting as a loading on the ringbeam.

Stage 12 assumes that the lower part of the roof is completed. At this stage the roof lower wet concrete loading assigned at Stage 11 is removed and replaced with the body force of the lower part of the roof.

Stage 13: Roof Upper Wet Concrete + Stage 14: Roof Complete

Stage 13 assumes that the upper part of the roof is being built and the poured concrete is acting as a loading on the lower part of the roof.

Stage 14 assumes that the roof is completed. At this stage the roof upper wet concrete loading assigned at Stage 13 is removed and replaced with the body force of the roof. For this, the weight of the upper part of the roof and the area of the top surface of the Roof Lower Part are computed automatically by the LUSAS Tank to derive a global distributed load, which can be viewed from the entries in the Attributes or Analyses Treeviews. If required, this could be verified by assigning self-weight loading to the upper part of the Roof and checking the reaction.

Stage 15: Ringbeam 2nd PS + Stage 16: Vertical PS

The remaining RingBeam prestress is added at Stage 15. (with the load factor now changed from 0.5 to 1.0). The structure is fully built at Stage 15, and the additional loading of the Vertical Prestress is added to Stage 16.

Stage 17: Horizontal PS + Stage 18: Operating Stage

Horizontal Prestress is added to Stage 17. Stage 18 models the operating (in-service) stage.

All the loadings used in the 2D Axisymmetric Static Analysis Model are included in this stage.

The prestress loadings are defined with the values obtained from the tank definition dialog and only the short-term prestress is applied.

Stage 19: Operating Stage (Long)

Stage 19 models the operating (in-service) stage for long-term.

All the loadings used in the 2D Axisymmetric Static Analysis Model are included in this stage.

The prestress loadings are defined with the values obtained from the tank definition dialog and only the long-term prestress is applied.

Running the analysis


With the model loaded:

Select the **Solve Now** button from the toolbar and click **OK** to run the analyses listed.

A LUSAS Datafile will be created from the model information. The LUSAS Solver uses this datafile to perform the analysis.

Viewing the results

• The deformed mesh plot for the final construction stage is shown below.

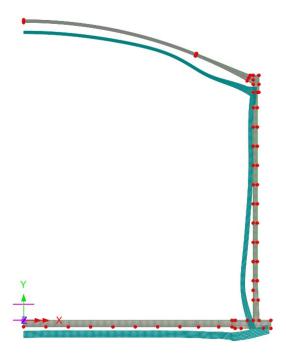

• Results can be viewed in a similar manner to that described for the <u>2D</u> Axisymmetric structural example.

Additional notes


Adding extra construction stages

If additional construction stages are required, the loadcase context menu items 'Copy' and 'Paste' can be used to duplicate construction stages (for renaming). Other loadcase-related attributes such as 'Activate' and 'Loading' are also copied.

Defining Load Combinations


Whilst load combinations can be defined using general combination facilities, they can be defined more quickly for LUSAS Tank created models by specifying data within a supplied template.

This sample Tank_Template_Combinations.xlsx spreadsheet is provided in the "<LUSAS installation folder>LUSASxxx\Programs\scripts\Tank" folder.

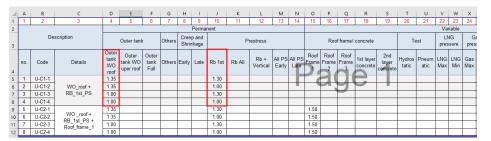

Looking at combination 'U-C1-1' from this spreadsheet, it might be necessary to extract the pure prestress effect from the staged construction analysis, due to the different load factors for self-weight and the prestress loading respectively.

The Ringbeam 1st Prestress is introduced at loadcase 6 (i.e Ringbeam 1st PS (staged) hence the pure effect of the that loadcase can be obtained by defining a load combination for loadcase 6 minus loadcase 5. This would be done by selecting the **Analyses > Basic Combination** menu item and on its dialog include **Increment 6** with a load factor of 1, and **Increment 5** with a load factor of -1 as shown, with a name of 'Stage 6 minus Stage 5 (Pure 1st PS)'

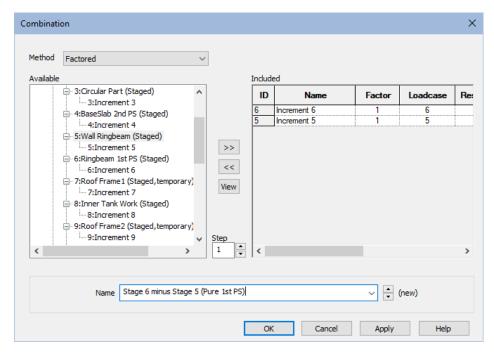

The resulting load combination of 'Stage 6 minus Stage 5 (Pure 1st PS)' can be used for defining the design load combinations U-C1-1 and U-C1-2 of the sample design load combination table.

Design combinations can be defined by selecting the menu item **Tank > Excel Tools > Design Combinations for Force/Moments**.

This facility requires the prior creation of input spreadsheets with the loadcase results (obtained from Export Forces/Design results) and combining them in Excel based on the factors read from the Tank Template Combination template.

2D Axisymmetric Coupled Thermal / Structural Tank Model


A 2D coupled thermal/structural analysis tank model is used to investigate temperature effects. Thermal data from this 2D analysis can be exported for use by a 3D shell model because the evaluation of heat transfer through thickness cannot be performed with shell elements.

Creating the model

To create a 2D coupled thermal/structural analysis tank model from previously defined tank definition data:

Tank

Create 2D Model
Coupled
Thermal/Structural

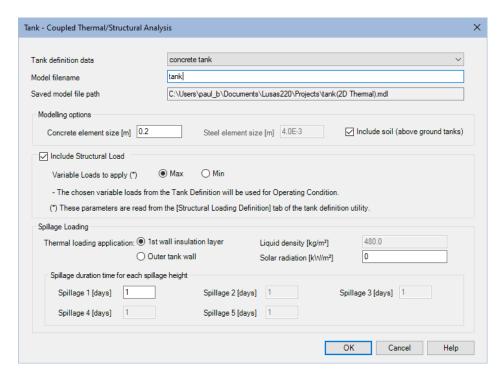




Tip. Press the **Help** button for more information about this dialog and the type of model that is created.

- Accepting the default values on the dialog, enter a model filename of **tank** and click **OK**. The filename entered will be appended with '(2DThermal)' to identify this model within the set of tank models that are being created.
- Click **OK** to save changes to the previously defined model.

After a short while the following model will be created.

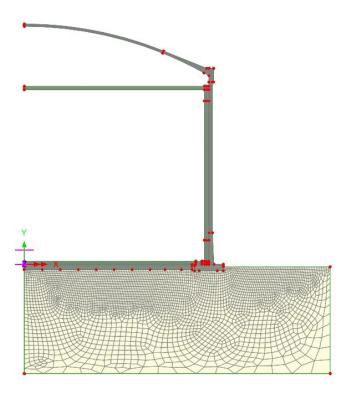



Note. Browsing the Groups , Attributes and Analyses treeviews will show the groups of features added, the attributes created and assigned to the model, and the analyses defined.



Note. Context menus for the items present can be used to locate features assigned to groups and to visualise attribute assignments.


Viewing assigned loadings

By ensuring the loading arrows are being drawn, and setting active each loadcase in turn, the loadings assigned to the model can be viewed and checked.

Running the analysis

With the model loaded:

Select the **Solve Now** button from the toolbar and click **OK** to run the analyses listed.

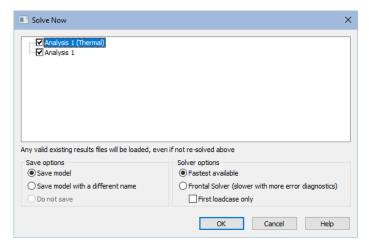

A LUSAS Datafile will be created from the model information. The LUSAS Solver uses this datafile to perform the analysis.


If the analysis is successful...

Analysis loadcase results are added to the 🖰 Treeview.


Viewing the results

Thermal and structural analysis loadcase results are present in the Treeview.


- In the Treeview, set active the loadcase Operating Condition (Thermal)
- With no features selected, click the right-hand mouse button in a blank part of the view window and select the **Contours** option to add the contours layer to the Treeview.
- Select entity **Temperature** and component **Temp** and click **OK**.

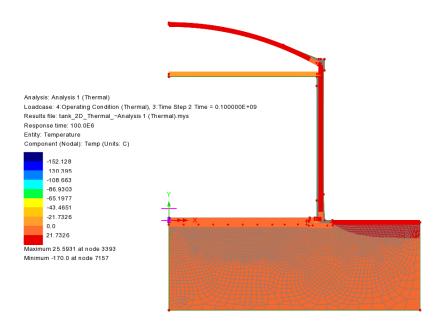

• Enlarging the view will show more detail.

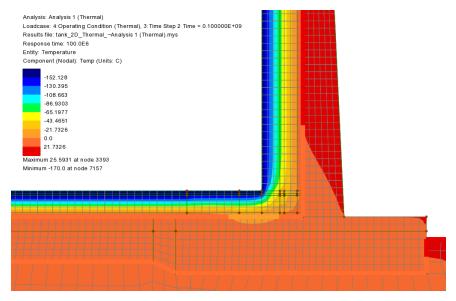


• In the Treeview, set active the loadcase Spillage 1 Condition (Thermal)

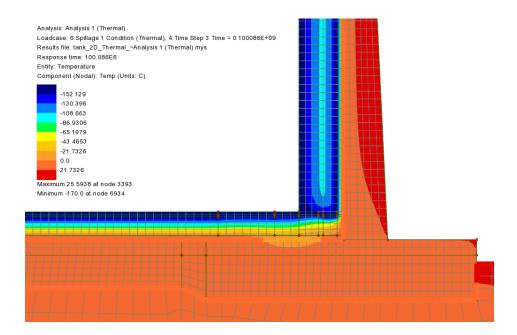

Exporting 2D thermal results


Thermal analysis results for a loadcase in a 2D thermal/structural model can be exported to a spreadsheet to enable thermal loading to be added as equivalent structural loading to a 3D shell model.

- With the loadcase **Operating Condition (Thermal)** active:
- Enter an output filename of 2d operating condition and press OK.



The spreadsheet created in the specified folder comprises worksheets containing temperature information for named regions of the tank, e.g. Roof, Wall_RingBeam and BaseSlab.



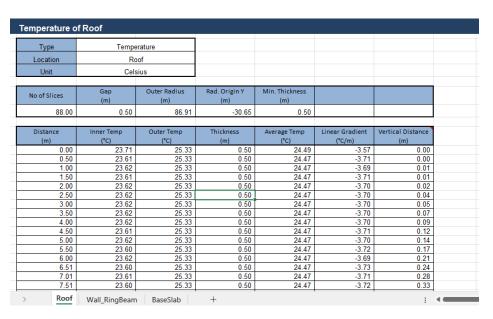

This completes this example.

Additional notes

- ☐ Thermal analysis results from solving a 2D thermal / structural model can be applied to a 3D shell model as equivalent structural loading using the Add Loading > Thermal menu item. To do so, up to four maximum and minimum thermal loading conditions need to be defined and solved in separate 2D thermal / structural models, and the loadcase 'Operating Condition Thermal ' set active in each model prior to exporting the temperatures to unique Excel spreadsheet names.
- ☐ Resultant forces from integration of stresses through thickness can also be obtained at regular intervals and for selected loadcases.



2D Beam-stick Seismic Tank Model


If seismicity is to be evaluated, a 2D beam-stick model can be created to provide seismic results that can also be applied to a 3D shell model. Horizontal actions excluding and including base pressure, and vertical actions may be modelled.

Create model

To create a 2D beam-stick model from previously defined tank definition data:

Tank

Create 2D Model
Seismic...

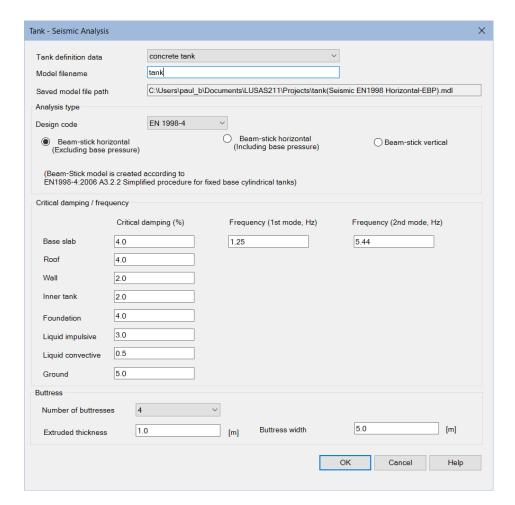



Tip. Press the **Help** button for more information about this dialog and the type of model that is created.



Note. Damping coefficients are computed based on the user inputs for a desired damping ratio (%) and the frequency range of the structure that would be obtained from a separate eigenvalue analysis. For structural members and impulsive liquid mass, Rayleigh Damping Coefficients are computed and used in the material definition. For Soil springs and convective mass, a Viscous Coefficient is used for horizontal movement considering the moving mass above the ground.


Accepting the remaining default values on the dialog (to model horizontal actions
excluding base pressure for the EN 1998-4 design code), enter a model filename
of tank and click OK. The filename entered will be appended with '(Seismic

EN1998 Horizontal-EBP)' to identify this model within the set of tank models that are being created.



Note. Valid buttress options are 0, 2, 3, 4 and 6. As the inclusion of buttresses makes the model non-axisymmetric, values other than zero are considered in the model by increasing the thickness of wall and ringbeam to an appropriate equivalent thickness.

Press the Fleshing on/off button to see the region of the model that represents the tank.

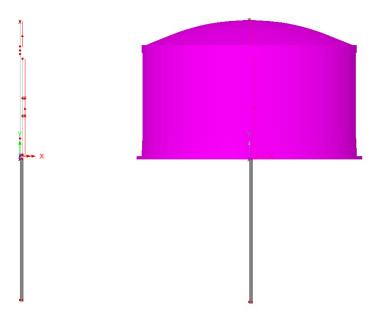

Fleshing 'Off'

Fleshing 'On'

The adopted arrangement of components allows for capturing the complex seismic behaviour of the liquid tank system in a simplified but accurate model.

If necessary, refer to the online help for a 2D seismic analysis tank model for more details of the model that is built.



Note. Browsing the Groups , Attributes and Analyses treeviews will show the groups of features added, the attributes created and assigned to the model, and the analyses defined.



Note. Context menus for the items present can be used to locate features assigned to groups and to visualise attribute assignments.

Running the analysis


With the model loaded:

Select the **Solve Now** button from the toolbar and click **OK** to run the analyses listed.


Analysis loadcase results are added to the Treeview and a deformed mesh layer is added to the view window.

Viewing the results

• Mode shapes may be viewed by setting active each loadcase in turn within the Analyses Treeview of the generated model. The first four modes shapes are shown.

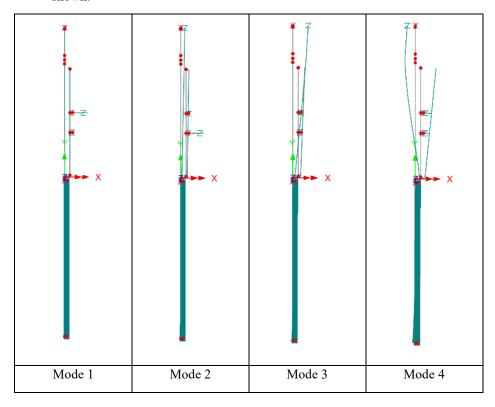


Tabulating eigenvalue results





- Select result type Eigenvalues
- Select all 4 results check box options and click **OK**.

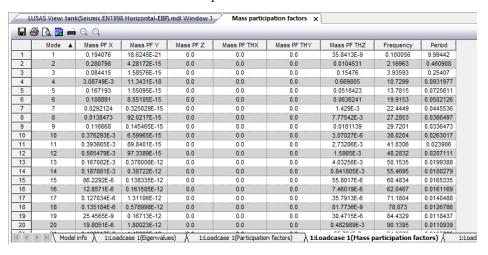


• On the spreadsheet displayed select the **Mass participation factors** tab.



Note. Looking at the mode shape and the mass participation factor, the 1st mode is for convective liquid mass, and the subsequent modes are mixed modes.


From this it would be reasonable to use the 2nd and 3rd frequencies obtained as the frequency range for computing damping constants for the 1st and 2nd mode frequencies, previously provided in the Tank - Seismic Analysis model creation dialog. This example does not do this however.



Diagrams

- In the Treeview, set active the loadcase **Mode 1**
- With no features selected, click the right-hand mouse button in a blank part of the view window and select the **Diagrams** option to add the diagrams layer to the Treeview.
- Select entity Force/Moment Thick 2D Beam and component Fy and click OK. The results plot for this selection is shown on the following set of images.
- In the Treeview, set active the loadcase Response spectrum CQC
- In the Treeview, set active the loadcase **Response spectrum SRSS**

The diagrams below show the Fy results for each of these loadcase selections.

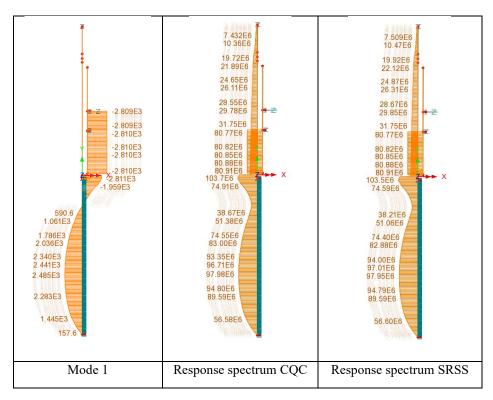

Show the damping applied to each mode

Because the option to **Include modal damping** is checked in the **Eigenvalue** control dialog, the modal damping factors computed for each mode are printed in the Solver output file, which has a file extension of '*.out'. This can be found at this location: <Current working folder> \LUSASFiles\ Example_EN1998_HorizontalBeamStick (EBP)

0941				
6942	$M \circ D A$	L DAMPI	ING FACTO	R S
6943				
6944				
6945				
6946	MODE	EIGENVALUE	FREQUENCY	VISCOUS DAMPING
6947	1	0.395226	0.100056	0.499824E-02
6948	2	185.836	2.16963	0.257686E-01
6949	3	611.580	3.93593	0.274186E-01
6950	4	4545.17	10.7299	0.449069E-01
6951	5	7498.12	13.7815	0.568389E-01
6952	6	15657.9	19.9153	0.867725E-01
6953	7	19888.1	22.4449	0.871627E-01
6954	8	29391.3	27.2853	0.112665
6955	9	34870.6	29.7201	0.105896
6956	10	57068.1	38.0204	0.144530

Design Response Spectrum

By default, the Tank system uses the response spectrum based on ASCE7-10 (2010). This entry is present in the Utilities Treeview.





Note. Other design codes may be selected from the dialog that is displayed when double-clicking this entry.




Note. User-defined spectrums and other design code spectrums can be defined by selecting the menu item **Utilities > Response Spectrum...**

Changing a design response spectrum

The response spectrum to be used for post-processing can be changed by editing an existing **IMD loadcase** attribute in the Treeview.

- In the Treeview, double click (for example) the **Response Spectrum SRSS** entry.
- On the IMD loadcase dialog press the **Set** button next to the Results droplist and use the Response droplist to choose a previously defined or new response spectrum.

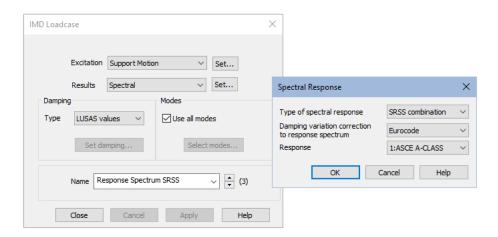

This completes this example.

Additional notes

□ Seismic analysis results from solving a 2D seismic beam-stick model can be used to provide seismic loading for a 3D shell model. This will require manual conversion of peak results into equivalent accelerations and forces to apply to the 3D shell model using the **Add Loading > Seismic** facility.

D Beam-stic	k Seismic Tan	k Model		


3D Shell Structural Tank Model

Creating the model

To create a 3D shell half-symmetric structural model from previously defined tank definition data:

Tank


Create 3D Shell Model

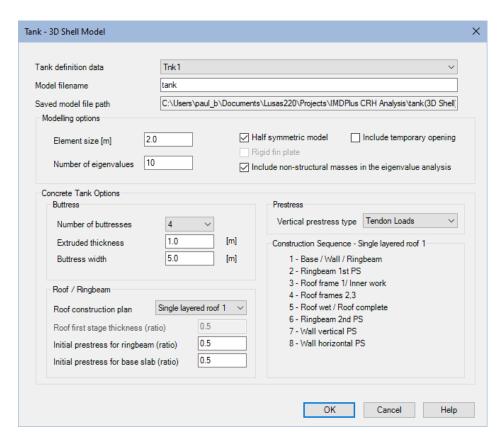


Tip. Press the **Help** button for more information about this dialog and the type of model that is created.

- Accept all the default values and settings, noting that even though 'Incude temporary opening' is selected in the dialog, no temporary openings are defined by default in the tank definition data (in the Wall and Ring beam Tank Openings dialog), so none will be modelled in this example) and enter a model filename of tank and click OK. The filename entered will be appended with '(3D Shell)' to identify this model within the set of tank models that are being created.
- Click **OK** to save any changes to the previously defined model.
- Click Yes to accept that the wall will be constructed all at once and not in stages.
- Click Yes to proceed with adding construction stage loads, then click OK to accept the default values presented.

From the settings made, the following model will be created.

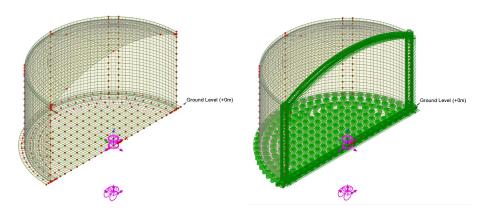







Note. By default, a 3D shell tank is supported on spring supports. Prior to creating a model, and from within the Tank Definition 3D Support tab, a detailed foundation may be chosen which, depending on the tank elevation setting in use, allows for isolator, pedestal, raft and pile type settings and dimensions to be specified. A different foundation may also be added to a model after it has been built. Help topics available provide more details.



Note. Tendon, thermal, seismic, staged construction, creep and shrinkage, spillage, and wind loading (from 2D tank model analysis and from other sources) may all be added to a 3D shell model prior to any design checks being made. However, for this short explanatory example, these will not be considered.



Note. Browsing the Groups , Attributes and Analyses treeviews will show the groups of features added, the attributes created and assigned to the model, and the analyses defined.




Note. Context menus for the items present can be used to locate features assigned to groups and to visualise attribute assignments.


Viewing assigned loadings

By ensuring the loading arrows are being drawn, and setting active each loadcase in turn, the loadings assigned to the model can be viewed and checked.

Defining reinforcement and tendons

For 3D shell models of concrete tanks, prestress loading is applied to the model initially by using dummy tendons (located at mid-thickness throughout the height of the tank wall) and at a spacing of approximately 1m centre-to-centre. The exact tendon profile, location and spacing arrangement required can defined and imported from a spreadsheet.



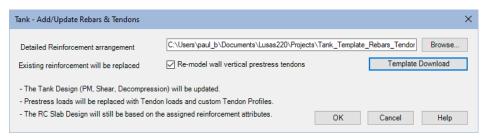


- On the dialog, press the Template Download button. A supplied template containing suitable rebar and tendon data will be saved to the working folder.
- Click OK to add rebar and replace all existing prestress loading with custom tendon profiles.

Running the analysis

With the model loaded:

Select the **Solve Now** button from the toolbar.

For simplicity only the Base Analysis and the Eigenvalue Analysis will be run for this example.



• On the Solve Now dialog <u>deselect</u> the **Seismic Analysis** and **Staged** Construction Analysis check boxes, then click **OK**.

Analysis loadcase results are added to the Treeview and a deformed mesh layer is added to the view window.

Viewing the results


- Turn off the display of the **Deformed mesh** layer.
- In the Treeview, set active the loadcase **SelfWeight**

Understanding element axes

In a 3D shell model the element local axes are not consistent in the structure as a whole. To see the element axes:

- Ensure that **Fleshing** is turned off so that element axes may be viewed.
- In the Treeview, double-click the Mesh entry and select Show element axes.
- Zooming in on the wall and base slab connection will show the element axes in those regions more clearly.

The x-axes of the elements in the group 'Tank Wall' (as identified by double headed arrows) are seen to be aligned horizontally within the wall. The elements in the group 'Tank Base Annular Part' similarly are aligned consistently, but the elements in the 'Tank BaseCircularPart' are inconsistently aligned – as shown in this enlarged view of the model

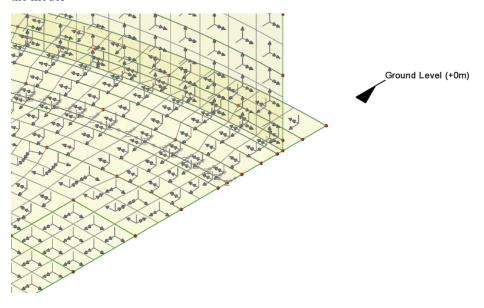



Note. The named groups in the Groups Treeview, can be **Set As Only Visible** in turn to see element axes for each set of features in isolation.

To plot results for a consistent direction, local coordinate sets and results transformation datasets can be used.

• In the Treeview, double-click the **Mesh** entry and turn off the selection of **Show element axes**.

Local coordinate sets

In the model created, cylindrical and spherical local coordinates are present in the Attributes Treeview. A cylindrical local coordinate system is used to obtain forces in the BaseSlab and Wall, and a Spherical local coordinate system is used to obtain forces in the Roof.

Results transformation datasets

In the model created, results transformation datasets are also present and assigned to the roof, wall, and base slab respectively. These are:

Results transformation dataset	Shell plane for	Local coordinate set
ResultTransformation_Roof	theta/phi	'Spherical for force Extraction'
ResultTransformation_Wall	theta/z	'Local Coord'
ResultTransformation_BaseSlab	r/theta	'Local Coord'

Plotting Contours

With regard to the bending moment in the wall, as the element local x-axis is in the horizontal direction in the model, the horizontal directional moment of Mx could be displayed for a selected loadcase. However, because the element local axes are not consistent in the structure as a whole, a local coordinate system is to be used for viewing results.


- With no features selected, click the right-hand mouse button in a blank part of the view window and select the Contours option to add the contours layer to the Treeview.
- On the contour properties dialog, select entity Force/Moment Thick Shell, then
 press the transform Set button and for the Specified local coordinate select
 Wall_Local from the droplist provided and theta/z from the 'Shell plane for

Results Transformation Properties O No transformation applied (consult Solver manual) Contour Results Appearance O Local axes of element/node O Local axes of parent feature Entity Force/Moment - Thick Shel V O Global axes Material Component Mt Specified local coordinate Display Averaged nodal 4:Wall_Local Set... Wall_Local Shell plane for resultants theta/z O Reference path No objects defined Display on slice(s) Draw in slice local direction x = longitudinal OK Cancel Help Cancel Apply Help

results' droplist, because the wall surface element axes have a theta and z direction. Click \mathbf{OK} .

This now makes available a moment results component 'Mt', where 't' represents the tangent direction in the cylindrical local coordinate system.


- Now, back on the contour properties dialog, select the result component **Mt** and click **OK**. The contours will be drawn on the whole model.
- To see only the forces/moments on the wall, in the Groups Treeview, rightclick on the **Tank Wall** entry and select **Set as Only Visible**.

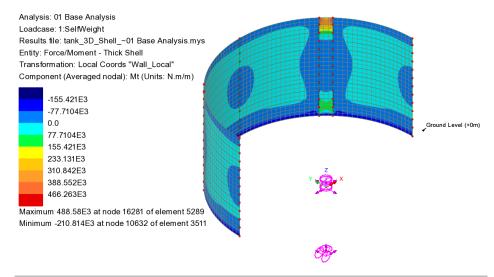




Note. If, on the Results Transformation dialog shown previously the option **Assigned** results transformation attribute option was chosen, results components of Nx and Ny could then be selected instead of Mt.

When this is done, any components with 'x' represent the results in the hoop direction (wall/roof) or radial direction (base slab), and those with 'y' represent results in the radial (roof) or vertical (wall) direction or the hoop (base slab) direction. If plotted on the whole model the following contour plots would be obtained.

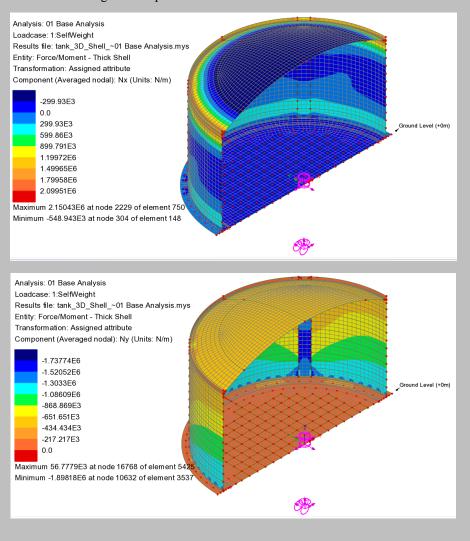

Values


• With the Tank Wall still set as only visible, values can be displayed for chosen nodes by adding the **Values** layer to the Layers treeview. Zooming in will provide more detail.

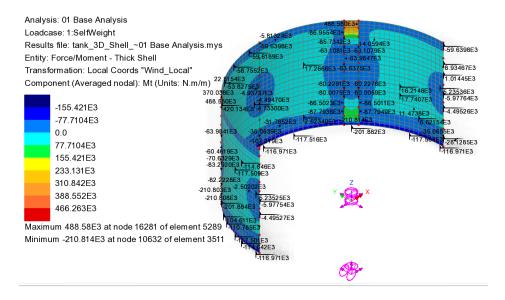

Graphing of results through the wall

Arbitrary line sections may be taken through any surface of a two dimensional model or on a slice cut through a three dimensional solid model. The process of cutting a slice will generate two graph datasets in the Utilities Treeview, the first containing the distance along the line section and the second containing the specified results along the line.


- Turn off the display of the Values layer
- Press the Y-axis button Y: N/A to view the model as shown in the following image.

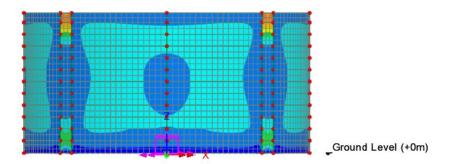

Utilities
Graph Through 2D


• On the dialog, ensure that **Snap to grid** is selected and enter a grid size of **2** and click **OK**.

• In the view window click and drag the cursor from <u>below</u> the bottom of the wall moving upwards to <u>above</u> the top of the wall as shown:

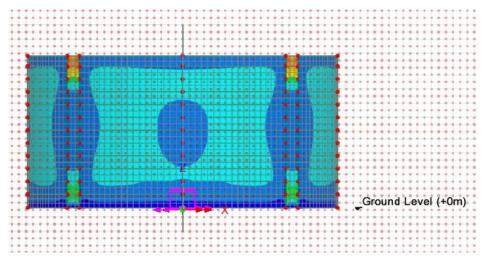

- Then, on the 'Loadcases and Extent' dialog, select SelfWeight and click Next, select entity Force/Moment – Thick Shell and results component Mt and click Next.
- Enter a title Force/Moment, an x-axis name of Height of wall, a y-axis name of Mt and click Finish.

A graph showing the variation of Mt with wall height is generated. As the units of the model are N,m, the unit for moment force is N-m.

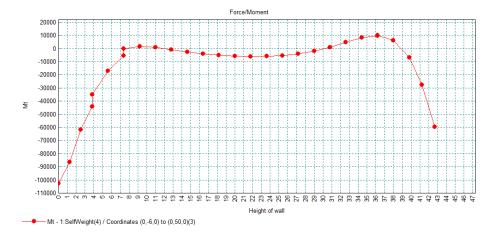

In this way, other 'arbitrary slices' could be taken through the wall manually to investigate other regions.




Re-select the normal cursor.

Export forces/design results to Excel (3D)

As an alternative to producing graphs manually and individually from slices through a model, forces and design results can be calculated for any slice through the model and exported to a spreadsheet, where graphs of data are also produced.



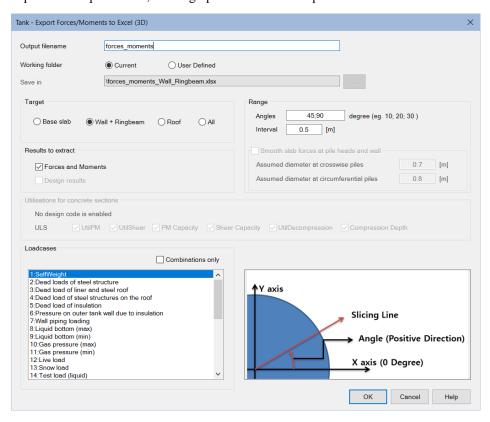


- Enter an output filename of **forces_moments** (noting that the name of the target will be appended to the name entered).
- Select a target of Wall + Ringbeam
- For the range, enter angles of 45;90
- For 'Results to extract' ensure that only **Forces and Moments** is selected. (Design results will be looked at later in this example)

Ensure that only the loadcase SelfWeight is selected and click OK

A spreadsheet named **forces_moments_Wall_Ringbeam.xlsx** will be created within your Projects folder.

• Outside of LUSAS Modeller, open this spreadsheet and select the **Moment–Hoop** tab.

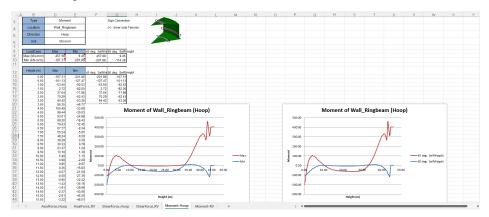



Note: A cylindrical local coordinate system is used to obtain forces in the BaseSlab and Wall, and a Spherical local coordinate system is used to obtain forces in the Roof.

Sign convention:

- ☐ Axial Force: (+) for Tension, (-) for Compression.
- ☐ Moment: (+) for Inner side tension, (-) for outer side tension.




Note: If all loadcases were selected from the list box (and not just the self-weight as in this example), the forces for each loadcase for each defined angle would be exported and saved in the spreadsheet.

Defining a basic combination

Straightforward combinations may be defined within LUSAS.



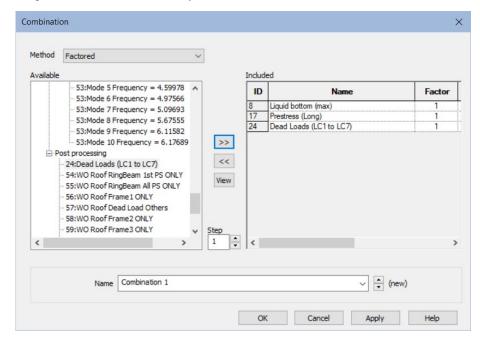


Include Liquid bottom (max) and Prestress (Long) from the Base Analysis section and Dead Loads (LC1 to LC7) from the Post-processing section in the combination, accept the default loadcase name of Combination 1 and click OK.

Note that the loadcase 'Dead loads (LC1 to LC7)' includes the loadcases for self-weight, dead loads on the structure, wall pressure and piping loading for ease of inclusion.

Press the Isometric button to return to this view of the model and reselect the normal cursor.

• In the Analyses Treeview, set active Combination 1

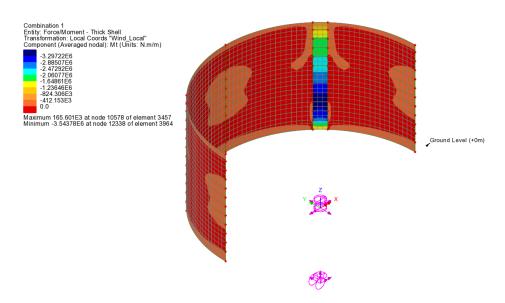




Note. Whilst load combinations can be defined using general combination facilities (as done in this example) they can be defined more quickly for LUSAS Tank created models by specifying data within a Design Load Combinations template. This can be accessed after a design code has been defined by selecting the menu item **Tank > Design Checks > Design Load Combination**

Enabling a design code check

Tank
Design Checks
Enable...




- Ensure design code EN1992-1-1 (2005) is selected.
- Ensure Computation target is set to **Visible** (to plot contours on the whole active part of the model) and click **OK**.

Once defined, a Tank design results entity for EN1992-1-1 (2005) (and its associated results components) can then be found within the contours and values properties droplists.

• In the Layers Treeview, double-click the Contours layer and select the entity Tank Design - BS EN 1992-1-1 (2005) and results component UtilPM_t and click OK.

Contours of utilisation will be drawn on the model.

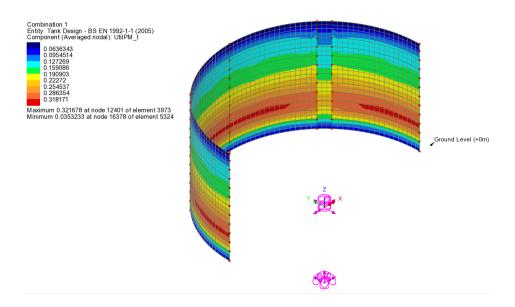


Export forces/design results to Excel (3D)

Detailed force/moments and design results for selected regions of a tank and loadcases of interest can be exported to a spreadsheet.

Tank

Design checks

Design Check Report...

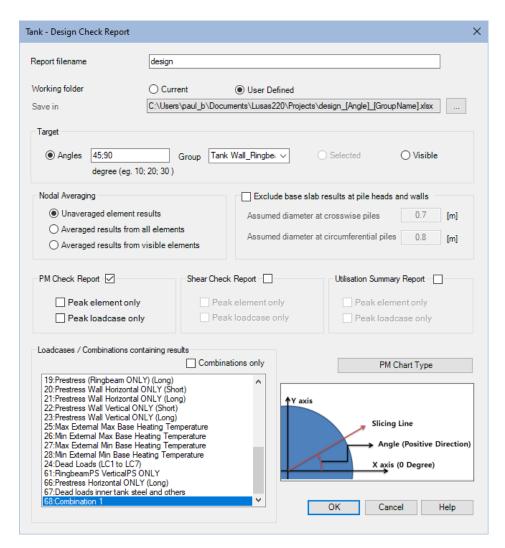


- Enter a report name of **design** (noting that the angle and group name will be appended to the name of each spreadsheet created).
- Enter target angles of 45;90
- Select a target group of Tank Wall_Ringbeam
- Ensure that only **PM Check Report** is selected.
- Ensure that only loadcase Combination 1 is selected and click OK



Note: A separate spreadsheet of results is created within your Projects folder for each angle specified.

- Open the spreadsheet design_90_Tank Wall_Ringbeam_PM.xlsx from within your Projects folder.
- Browse the tabs to see the types of results that are output.

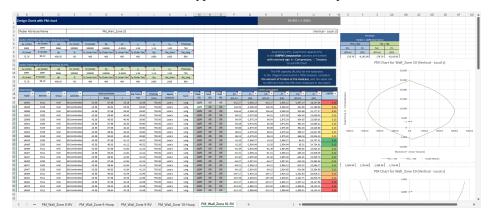

This completes this example.

Additional notes

After a 3D shell 'base' model has been created, additional loading may be considered by using **Tank > Add loading** menu items:

- □ Thermal If a thermal analysis is required, note that the evaluation of heat transfer through thickness cannot be performed with shell elements, so thermal analysis using unique 2D axisymmetric thermal/structural models should be carried out first to investigate maximum and minimum loading conditions. Temperatures obtained from these 2D analysis may be exported to unique Excel spreadsheets before using the menu item Tank > Add loading > Temperature to add the respective maximum and minimum thermal loading conditions to the 3D shell model as equivalent structural loading.
- ☐ Seismic Seismic loading obtained from a separate dynamic model/analysis (e.g. a 2D beam-stick model) can be added to this model.
- □ Staged construction All structural dead loads and either maximum or minimum variable loads as defined on the Tank definition 'Load' tab file will be added to the model. Variable loads may have a load factor applied.

☐ Creep and Shrinkage - Once a staged construction analysis has been set up, a new creep and shrinkage analysis can be created which will consider the same stages but in a viscous analysis in the time domain.
☐ Spillage - Spillage equivalent temperatures can be imported from a spreadsheet in the same way as described for other thermal loads.
☐ Wind loading - Wall and roof loading is computed according to a selected design code.
Additional analyses may be added to those present as required:
☐ Eigenvalue Buckling analysis - Eigenvalue buckling analyses based on existing loadcases.
☐ GNL Buckling analysis - A geometrically nonlinear buckling analysis based on an existing loadcase.


שוופ שפ	en Structura	i rank widue	l		

3D Solid Coupled Thermal / Structural Tank Model

Creating the model

To create a 3D solid quarter-symmetric model from previously defined tank definition data:

Tank
Create 3D Solid
Model

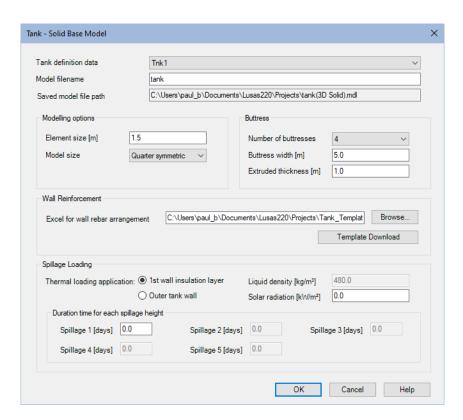




Tip. Press the **Help** button for more information about this dialog and the type of model that is created.

- Enter a model filename of **tank** noting that the filename entered will be appended with '(3D Solid)' to identify this model within the set of tank models that are being created.
- For 'Model size' select **Quarter symmetric** from the droplist. Click **OK** to save any changes to the previously defined model.
- Press the Template Download button. A supplied template containing suitable rebar and tendon data will be saved to the working folder.
- Click **OK** to add rebar and replace all existing prestress loading with custom tendon profiles.

From the settings made, the following model will be created.





Note. A 3D solid tank model is supported only on simple spring supports. A quarter model is used because of symmetry and to keep solution time to a minimum for this example.



Note. Browsing the Groups , Attributes and Analyses treeviews will show the groups of features added, the attributes created and assigned to the model, and the analyses defined.



Note. Context menus for the items present can be used to locate features assigned to groups and to visualise attribute assignments.

Viewing assigned loadings

By ensuring the loading arrows are being drawn, and setting active each loadcase in turn, the loadings assigned to the model can be viewed and checked.

Running the analysis

With the model loaded:

• Select the Solve Now button from the toolbar, then click OK.






Note. Solving of multiple analyses for a solid model may take an appreciable time.

On completion, analysis loadcase results are added to the Treeview and a deformed mesh layer is added to the view window. The deformed mesh layer is only of relevance for a structural loadcase.


Viewing the results

Thermal and structural analysis loadcase results are present in the 🕒 Treeview.


- In the Treeview, set active the loadcase Operating Condition (Thermal)
- With no features selected, click the right-hand mouse button in a blank part of the view window and select the **Contours** option to add the contours layer to the Treeview.
- Select entity Temperature and component Temp and click OK.

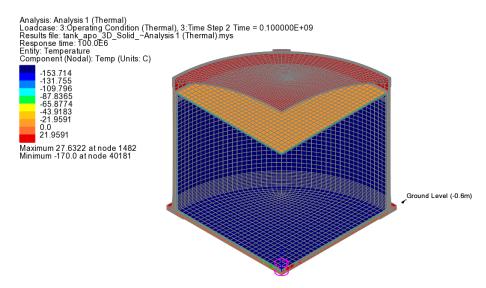

The values obtained from the 3D solid model can be seen to be similar to those obtained from the 2D coupled thermal/structural analysis (shown right).




In the Treeview, set active the loadcase Spillage Condition (Thermal) – Spillage 1

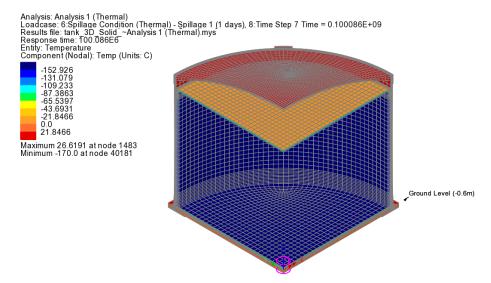

Exporting forces/design results

Results for chosen loadcases can be exported to a spreadsheet. Axial force, shear force and bending moments in two orthogonal directions (according to the results transformations) are provided.



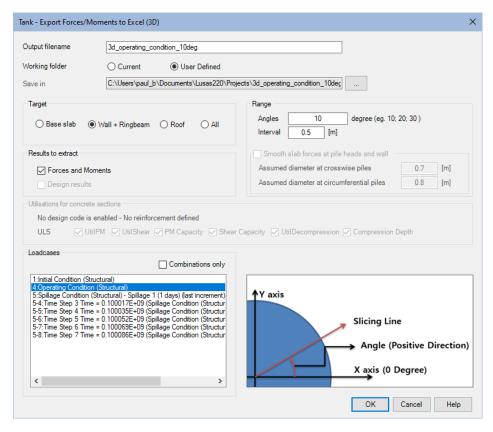


- Enter an output filename of **3d_operating_condition_10deg** noting that a target group name will also be added to the name entered.
- Select a target of Wall + Ringbeam
- Enter a slice angle of **10** degrees
- Ensure Forces and Moments is selected.
- In the loadcases panel ensure that Operating temperature is selected and click OK.



Note. Forces in the target selected are extracted by slicing the geometry at the defined angle, which calculates the forces from integration of stresses for those slices through the model.

The spreadsheets created in the specified folder comprise worksheets that contain force and moment data for the specified regions of the tank, e.g. Roof, Wall + RingBeam and BaseSlab.

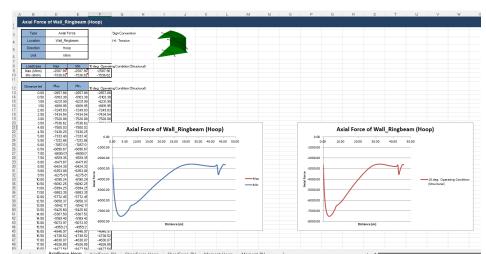

The spreadsheet for the target of Wall + RingBeam is shown below.

This completes this example.

Additional notes

- ☐ The exporting of forces for 3D solid models cannot exclude slab results at pile heads and will not include results from any buttress that may be present at each specified angle.
- ☐ For 3D solid models, the wall forces computed from integrating stresses through thickness do not include the shells contribution, which should be added manually.

